




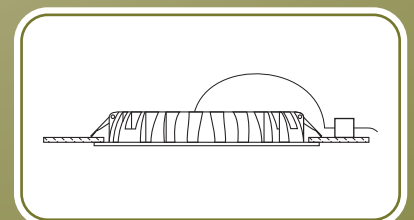


Beam Angle  110°

Ra > 80

Available in

 4"	 6"
6W & 10W	15W & 20W




Features:

The Pharox Tulip is a classic down light having simple minimalist design which blends with your decor. It's a perfect replacement for the conventional CFL down light and good all-rounder for the secondary areas in an office like corridors and waiting areas. The advantages being its long life of 35,000 operating hours at L70 lumen maintenance and not to miss the signature Tulip heat sink design.

Design:

- Slim pressure die cast aluminium body for efficient heat dissipation.
- High transmittance polycarbonate diffuser for optimum light output.
- High efficiency driver to match customer expectations.

Dimensional Data:

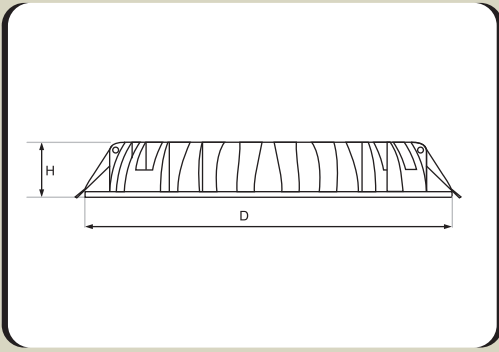

Dimensions	6W	10W	15W	20W
Length (L)	NA	NA	NA	NA
Breadth (B)	NA	NA	NA	NA
Height (H)	32mm	32mm	32mm	32mm
Diameter (D)	120mm	120mm	180mm	180mm
Cut Out	110mm	110mm	160mm	160mm

Product Specifications:

Product Code	Product Description	Power	CCT	Lumens	Power Factor
TLD006C000	Pharox - Tulip - 6W 6500K Down Light	6W	6500K	425lm	>0.85
TLD006N000	Pharox - Tulip - 6W 4000K Down Light	6W	4000K	400lm	>0.85
TLD006W000	Pharox - Tulip - 6W 3000K Down Light	6W	3000K	380lm	>0.85
TLD010C000	Pharox - Tulip - 10W 6500K Down Light	10W	6500K	670lm	>0.85
TLD010N000	Pharox - Tulip - 10W 4000K Down Light	10W	4000K	640lm	>0.85
TLD010W000	Pharox - Tulip - 10W 3000K Down Light	10W	3000K	600lm	>0.85
TLD015C000	Pharox - Tulip - 15W 6500K Down Light	15W	6500K	1050lm	>0.90
TLD015N000	Pharox - Tulip - 15W 4000K Down Light	15W	4000K	1000lm	>0.90
TLD015W000	Pharox - Tulip - 15W 3000K Down Light	15W	3000K	950lm	>0.90
TLD020C000	Pharox - Tulip - 20W 6500K Down Light	20W	6500K	1520lm	>0.90
TLD020N000	Pharox - Tulip - 20W 4000K Down Light	20W	4000K	1450lm	>0.90
TLD020W000	Pharox - Tulip - 20W 3000K Down Light	20W	3000K	1380lm	>0.90

Performance Guide: Watts/m²

Ht.(mtrs)	Lux Level*		
	250	200	150
3.5	7.2	5.4	3.9
3	6	4.8	3.6
2.5	5.44	4.35	3.26

Reflectances:	
Ceiling	80%
Floor	20%
Walls	50%

Light Loss Factor: 0.8

Lumens: 1050lm

*For 15W CW (6") luminaire
Data available on request for other variants